

# BLUETOOTH ADAPTER (GENERIC)

REF: E088-0 01-02-08


## INSTALLATION INSTRUCTIONS

The Bluetooth Adapter provides the facility to connect Bluetooth equipped mobile telephones to Lynx equipment.

The Bluetooth Adapter can be used with an Audio Adapter or any interface from the latest range of portable radio equipment.

When used with radio equipment, the adapter supports the radio priority audio mute function and any Bluetooth audio is automatically reduced in volume during radio reception.

The adapter provides a minimum of eight hours talk time and three hundred hours standby time.

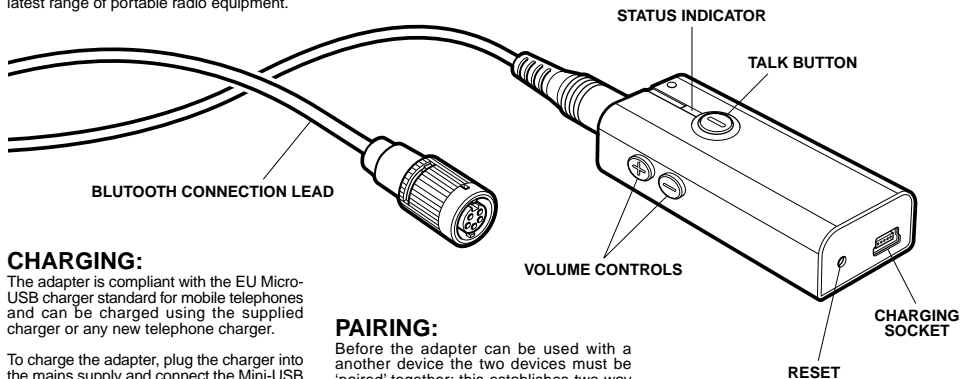

### CHARGING:

The adapter is compliant with the EU Micro-USB charger standard for mobile telephones and can be charged using the supplied charger or any new telephone charger.

To charge the adapter, plug the charger into the mains supply and connect the Mini-USB connector to the charging socket.

The status indicator shows red while the adapter is charging and goes off when the adapter is fully charged. Charging takes approximately one hour.

### WARNING:

The mains charger supplied with the Bluetooth Adapter is designed specifically for use with equipment manufactured by Lynx Avionics; do not use with other makes and models of equipment.

Never expose the charger to rain or moisture. The charger is not waterproof and is only intended to be used indoors.



The charger contains live parts, at mains voltage, and should not be dismantled.

### ON/OFF CONTROL:

The adapter is turned on and off using the volume control buttons.

1. To turn the adapter on, press and hold the **VOLUME(+)** button for three seconds.

The status indicator will flash blue every two seconds.

2. To turn the adapter off, press and hold the **VOLUME(-)** button for three seconds.

### PAIRING:

Before the adapter can be used with another device the two devices must be 'paired' together; this establishes two way communication between the two devices and stores the connection information for future use.

To pair the adapter with a telephone:

1. Turn both devices on.
2. Set the adapter to pairing mode (discoverable) by pressing and holding the **TALK** button for eight seconds.

The status indicator will flash red and blue.

3. Use the telephone's Bluetooth pairing procedure to look for new devices.

The adapter will appear in the list of available devices as: **Lynx BTA-1**

4. Select the adapter (Lynx BTA-1) and enter the PIN passcode: **0000**

The status indicator will flash blue twice to indicate that the pairing has been successful.

It can take up to sixty seconds for two devices to establish a connection the first time that they are used together.

The adapter can store pairing information for eight Bluetooth devices but only one device can be connected at a time.

Any of the eight paired devices can initiate a connection to the adapter but the adapter will only automatically reconnect to the last device used.

Once the adapter has been paired and connected to a device, it will reconnect automatically whenever it is within range.

### MAKING CALLS:

The adapter supports the Bluetooth Handsfree profile and, depending on the telephone, will provide at least the minimum basic functions listed below:

1. To answer a call or end a call, press the **TALK** button for less than one second.
2. To transfer a call back to the telephone, press and hold the **TALK** button until you hear a tone.
3. To reject a call without answering, press and hold the **TALK** button until you hear a tone.
4. To redial the last number called, press and hold the **TALK** button until you hear a tone.
5. To adjust the headset volume during a call, use the **VOLUME** control buttons on the adapter.

### DEFAULT SETTINGS:

The adapter can be returned to the factory default settings by pressing the **RESET** switch.

**IMPORTANT**

READ THIS INFORMATION CAREFULLY BEFORE ATTEMPTING TO USE THIS ITEM OF EQUIPMENT